



V917565N24QC
128M x 72 HIGH PERFORMANCE
REGISTERED DDR2 ECC SDRAM MODULE

Features


- 240-pin, registered dual in-line memory module
- JEDEC standard 1.8V ± 0.1V power supply
- VDDQ=1.8V ± 0.1V
- Fast data transfer rate:PC2-4200, or PC2-5300, or PC2-6400
- Programmable CAS Latency(CL): 3, 4, 5 for DDR2-400/533/667/800(G5). 4, 5, 6 for DDR2-800(G6)
- Programmable Additive Latency(AL): 0, 1, 2, 3, 4, and 5
- Write Latency(WL)=Read Latency(RL)-1
- Programmable burst lengths: 4 or 8
- Differential data strobe (DQS, \overline{DQS})
(Single ended data strobe option)
- On-die termination (ODT)
- Adjustable data-output drive strength
- 64ms, 8192-cycle refresh
- Serial Presence Detect (SPD) with EEPROM

Description


The V917565N24QC memory module is organized as 134,217,728 x 72 bits in a 240 pin memory module. The 128M x 72 Registered ECC memory module uses 18 ProMOS 128M x 4 DDR2 SDRAMs. The x72 modules are ideal for use in high performance computer systems where increased memory density and fast access times are required.

Speed Grade


	DDR2-533 PC2-4200 (E4)	DDR2-667 PC2-5300 (F5)	DDR2-800 PC2-6400 (G5)	DDR2-800 PC2-6400 (G6)
Bandwith@CL=3	400	400	400	–
Bandwith@CL=4	533	533	533	533
Bandwith@CL=5	533	667	800	667
Bandwith@CL=6	–	–	–	800
CL-tRCD-tRP	4-4-4	5-5-5	5-5-5	6-6-6

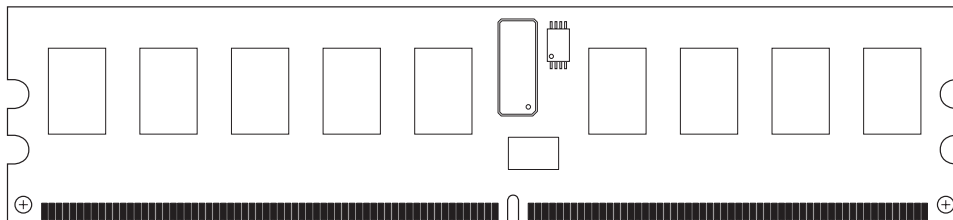

Part Number Information

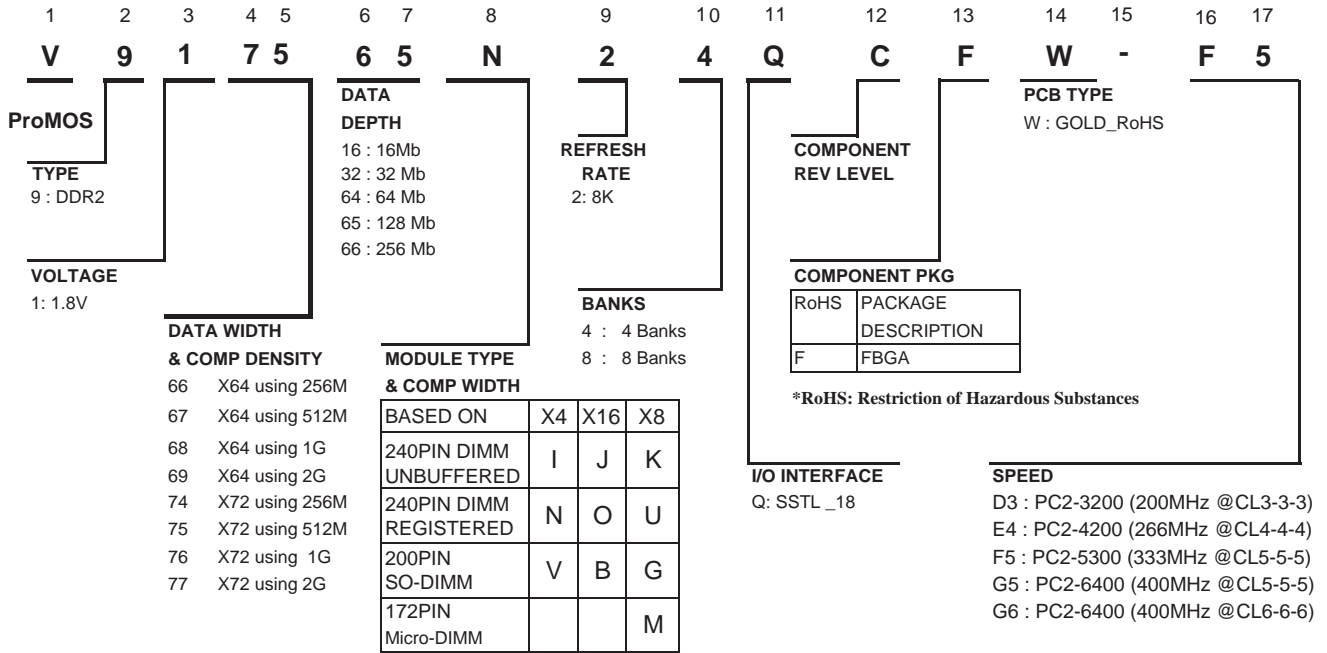

Block Diagram

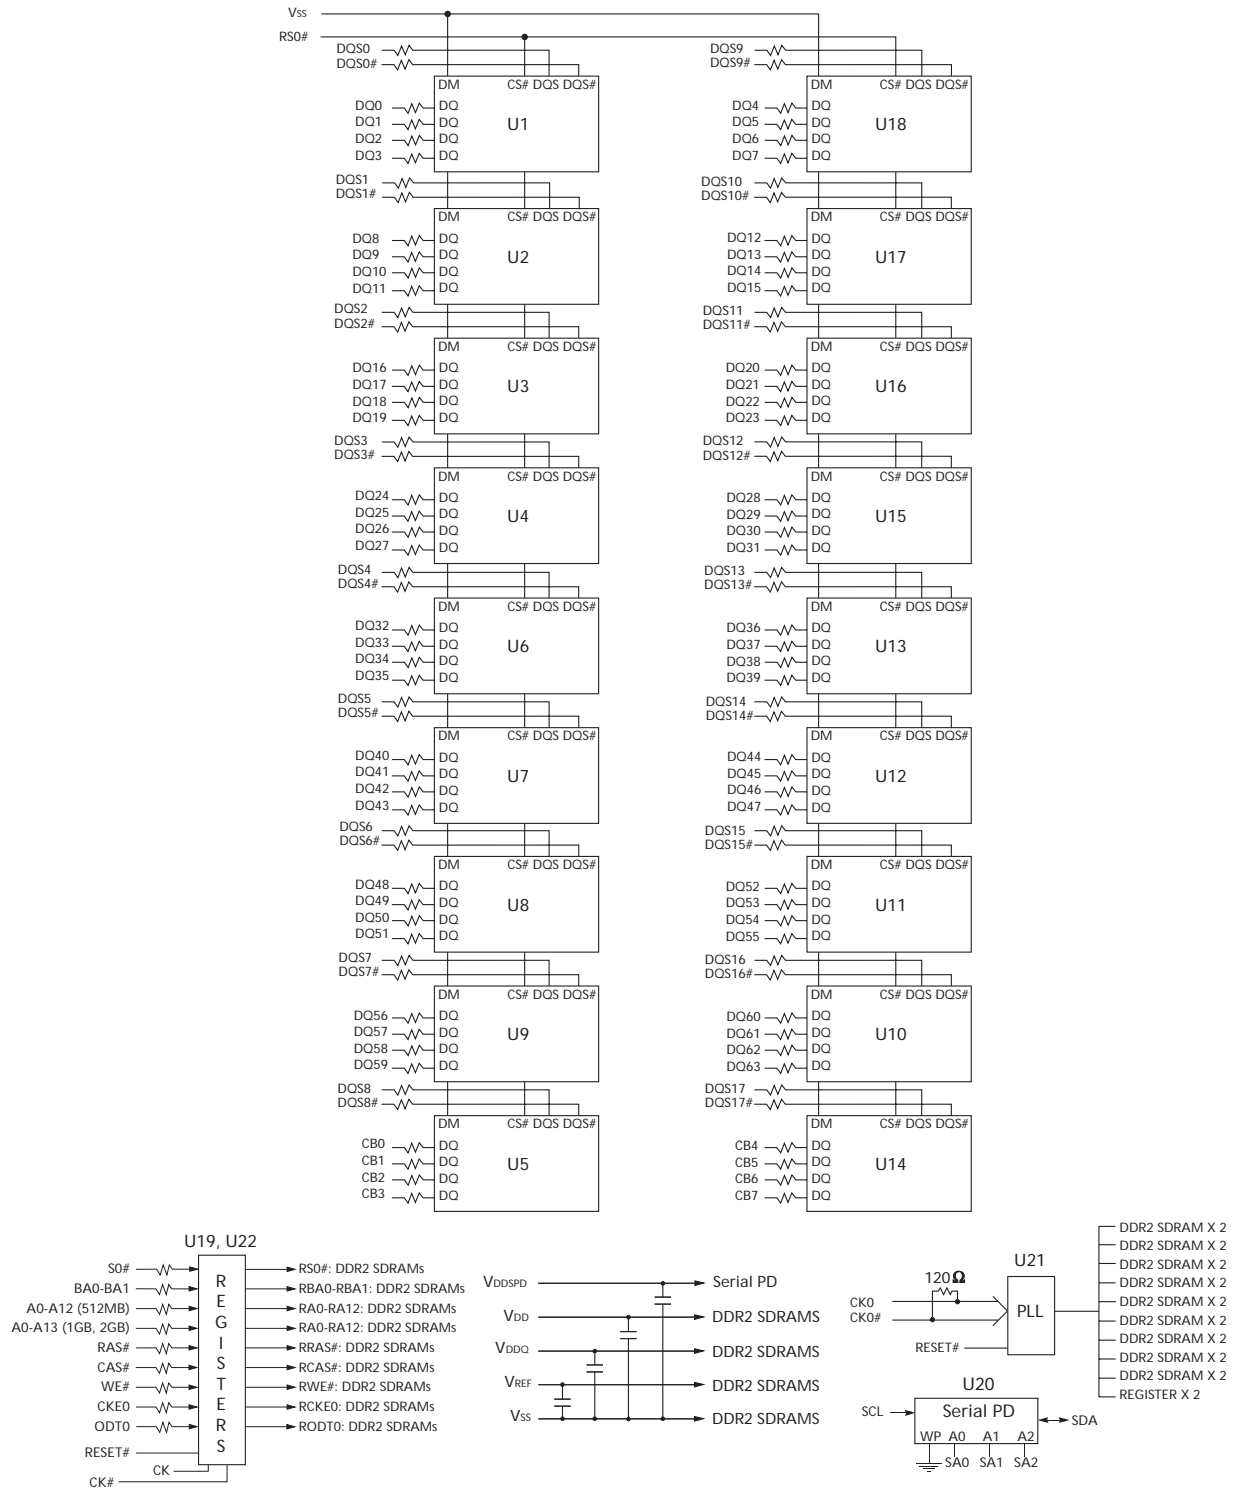

Pin Configuration (front/back side)

240-Pin DIMM Front								240-Pin DIMM Back							
PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	VREF	31	DQ19	61	A4	91	Vss	121	Vss	151	Vss	181	VDDQ	211	DM5/DQS14
2	Vss	32	Vss	62	VDDQ	92	DQS5#	122	DQ4	152	DQ28	182	A3	212	NC/DQS14#
3	DQ0	33	DQ24	63	A2	93	DQS5	123	DQ5	153	DQ29	183	A1	213	Vss
4	DQ1	34	DQ25	64	VDD	94	Vss	124	Vss	154	Vss	184	VDD	214	DQ46
5	Vss	35	Vss	65	Vss	95	DQ42	125	DM0/DQS9	155	DM3/DQS12	185	CK0	215	DQ47
6	DQS0#	36	DQS3#	66	Vss	96	DQ43	126	NC/DQS#9	156	NC/DQS12#	186	CK0#	216	Vss
7	DQS0	37	DQS3	67	VDD	97	Vss	127	Vss	157	Vss	187	VDD	217	DQ52
8	Vss	38	Vss	68	NC	98	DQ48	128	DQ6	158	DQ30	188	A0	218	DQ53
9	DQ2	39	DQ26	69	VDD	99	DQ49	129	DQ7	159	DQ31	189	VDD	219	Vss
10	DQ3	40	DQ27	70	A10/AP	100	Vss	130	Vss	160	Vss	190	BA1	220	CK2
11	Vss	41	Vss	71	BA0	101	SA2	131	DQ12	161	CB4	191	VDDQ	221	CK2#
12	DQ8	42	CB0	72	VDDQ	102	NC	132	DQ13	162	CB5	192	RAS#	222	Vss
13	DQ9	43	CB1	73	WE#	103	Vss	133	Vss	163	Vss	193	S0#	223	DM6/DQS15
14	Vss	44	Vss	74	CAS#	104	DQS6#	134	DM1/DQS10	164	DM8/DQS17	194	VDDQ	224	NC/DQS15#
15	DQS1#	45	DQS8#	75	VDDQ	105	DQS6	135	NC/DQS10#	165	NC/DQS17#	195	ODT0	225	Vss
16	DQS1	46	DQS8	76	S1#	106	Vss	136	Vss	166	Vss	196	A13	226	DQ54
17	Vss	47	Vss	77	ODT1	107	DQ50	137	CK1	167	CB6	197	VDD	227	DQ55
18	NC	48	CB2	78	VDDQ	108	DQ51	138	CK1#	168	CB7	198	Vss	228	Vss
19	NC	49	CB3	79	Vss	109	Vss	139	Vss	169	Vss	199	DQ36	229	DQ60
20	Vss	50	Vss	80	DQ32	110	DQ56	140	DQ14	170	VDDQ	200	DQ37	230	DQ61
21	DQ10	51	VDDQ	81	DQ33	111	DQ57	141	DQ15	171	CKE1	201	Vss	231	Vss
22	DQ11	52	CKE0	82	Vss	112	Vss	142	Vss	172	VDD	202	DM4/DQS13	232	DM7/DQS16
23	Vss	53	VDD	83	DQS4#	113	DQS7#	143	DQ20	173	NC	203	NC/DQS13#	233	NC/DQS16#
24	DQ16	54	NC	84	DQS4	114	DQS7	144	DQ21	174	NC	204	Vss	234	Vss
25	DQ17	55	NC	85	Vss	115	Vss	145	Vss	175	VDDQ	205	DQ38	235	DQ62
26	Vss	56	VDDQ	86	DQ34	116	DQ58	146	DM2/DQS11	176	A12	206	DQ39	236	DQ63
27	DQS2#	57	A11	87	DQ35	117	DQ59	147	NC/DQS11#	177	A9	207	Vss	237	Vss
28	DQS2	58	A7	88	Vss	118	Vss	148	Vss	178	VDD	208	DQ44	238	VDDSPD
29	Vss	59	VDD	89	DQ40	119	SDA	149	DQ22	179	A8	209	DQ45	239	SA0
30	DQ18	60	A5	90	DQ41	120	SCL	150	DQ23	180	A6	210	Vss	240	SA1

Pin Description

Symbol	Type	Function
CK0-CK2 CK0#-CK2#	Input	CK and CK# are differential clock inputs. All the SDRAM addr/cntl inputs are sampled on the crossing of positive edge of CK and negative edge of CK#. Output (read) data is reference to the crossing of CK and CK# (Both directions of crossing)
CKE0-CKE1	Input	Activates the SDRAM CK signal when high and deactivates the CK Signal When low. By deactivating the clocks, CKE low initiates the Powe Down mode, or the Self-Refresh mode
S0#-S1#	Input	Enables the associated SDRAM command decoder when low and disables the command decoder when high. When the command decoder is disbled, new command are ignored but previous operations continue. This signal provides for external rank selection on systems with multiple ranks
RAS#, CAS#, WE#	Input	RAS#, CAS#, WE# (ALONG WITH CS#) define the command being entered.
ODT0-ODT1	Input	When high, termination resistance is enabled for all DQ, DQ# and DM pins, assuming the function is enabled in the Extended Mode Register Set (EMRS).
V _{REF}	Supply	Reference voltage for SSTL 18 inputs.
V _{DDQ}	Supply	Power supply for the DDR II SDRAM output buffers to provide improved noise immunity. For all current DDR2 unbuffered DIMM designs, VDDQ shares the same power plane as VDD pins.
BA0-BA1	Input	Selects which SDRAM BANK of four is activated.
A0-A13	Input	During a Bank Activate command cycle, Address input defines the row address (RA0-RA13) During a Read or Write command cycle, Address input defines the colum address, In addition to the column address, AP is used to invoke autoprecharge operation at the end of the burst read or write cycle. If AP is high, autoprecharge is selected and BA0, BA1 defines the bank to be precharged. If AP is low, autoprecharge is disbled. During a precharge command cycle, AP is used in conjunction with BA0, BA1 to control which bank(s) to precharge. If AP is high, all banks will be precharged regardless of the state of BA0, BA1. If AP is low, BA0, BA1are used to define which bank to pre-charge.
DQ0-DQ63 CB0-CB7	In/Out	Data and Check Bit Input/Output pins.
DM0-DM8 DQS9-DQS17	Input	DM is an input mask signal for write data. Input data is masked when DM is sampled High coincident with that input data during a write access. DM is sampled on both edges of DQS. Although DM pins are input only, the DM loading matches the DQ and DQS loading. If the RQDS is disabled then DQS9-DQS17 become DM0-DM8 and DQS9#-DQS17# are not used. The differential mode is enabled via the LOAD MODE Register command.
DQS0-DQS8 DQS0#-DQS17#	In/Out	Data strobe for input and output data. For Rawcards using x16 orginized DRAMs DQ0-7 connect the LDQS pin of the DRAMs and DQ8-17 connect to the UDQS pin of the DRAM. DQS0#-DQS17# are used when differential mode is enabled via the LOAD MODE Register Comm- and.
SA0-SA2	Input	These signals and tied at the system planar to either V _{SS} or V _{DD} to configure the serial SPD EER-POM address range.
SDA	In/Out	This bidirectional pin is used to transfer data into or out of the SPD EEPROM. A resistor must be connected from the SDA bus line to VDD to act as a pullup on the system board.
SCL	Input	This signal is used to clock data into and out of the SPD EEPROM. A resistor may be connected from the SCL bus time to VDD to act as a pullup onthe system board.
V _{DD} SPD	Supply	Power supply for SPD EEPROM. This supply is separate from the V _{DD} /V _{DDQ} power plane. EEPROM supply is operable from 1.7V to 3.6V.
V _{DD} , V _{SS}	Supply	Power and ground for DDR2 SDRAM input buffers, and core logic. VDD and VDDQ pins are tied to V _{DD} /V _{DDQ} planes on these modules.

Serial Presence Detect Information

Bin Sort:

E4 (PC2-4200 @ CL4) G5 (PC2-6400 @ CL5)

F5 (PC2-5300 @ CL5) G6 (PC2-6400 @ CL6)

Byte #	Function described	Function Supported				Hex value			
		E4	F5	G5	G6	E4	F5	G5	G6
0	Defines # of Bytes written into serial memory at module manufacturer	128bytes				80h			
1	Total # of Bytes of SPD memory device	256bytes				08h			
2	Fundamental memory type	SDRAM DDR2				08h			
3	# of row address on this assembly	14				0Eh			
4	# of column address on this assembly	11				0Bh			
5	Module attributes-Number of DIMM Banks, Package and Height	1.18in., Single bank				60h			
6	Data width of this assembly	72 bits				48h			
7Data width of this assembly	-				00h			
8	VDDQ and interface standard of this assembly	SSTL 1.8V				05h			
9	DDR SDRAM cycle time at CL=X	3.75ns	3.0ns	2.5ns	2.5ns	3Dh	30h	25h	25h
10	DDR SDRAM Access time from clock at CL=X	±0.50ns	±0.45ns	±0.40ns	±0.40ns	50h	45h	40h	40h
11	DIMM configuration type(Non-parity, Parity, ECC)	A/C parity / data ECC				06h			
12	Refresh rate & type	7.8us & Self refresh				82h			
13	Primary DDR SDRAM width	x4				04h			
14	Error checking DDR SDRAM data width	x4				04h			
15	Reserved	-				00h			
16	DDR SDRAM device attributes : Burst lengths supported	4,8				0Ch			
17	DDR SDRAM device attributes : # of banks on each DDR SDRAM	4 banks				04h			
18	DDR SDRAM device attributes : CAS Latency supported	3,4,5		4,5,6		38h		70h	
19	Reserved	<4.10mm				01h			
20	DDR2 DIMM Type	RDIMM				01h			
21	DDR2 SDRAM module attributes	1 PLL / 2 Registers				05h			
22	DDR2 SDRAM device attributes : General	PASR/ODT/Supports weak driver				07h			
23	DDR SDRAM cycle time at CL=X-1	3.75ns	3.75ns	3.75ns	3.0ns	3Dh	3Dh	3Dh	30h
24	DDR SDRAM Access time from CL=X-1	±0.50ns	±0.50ns	±0.5ns	±0.45ns	50h	50h	50h	45h
25	DDR SDRAM cycle time at CL=X-2	5.0ns				50h			
26	DDR SDRAM Access time from CL=X-2	±0.60ns				60h			
27	Minimum row precharge time (=t _{RP})	15ns	15ns	12.5ns	15ns	3Ch	3Ch	32h	3Ch
28	Minimum row activate to row active delay (=t _{RRD})	7.5ns	7.5ns	7.5ns	7.5ns	1Eh	1Eh	1Eh	1Eh
29	Minimum RAS to CAS delay (=t _{RCD})	15ns	15ns	12.5ns	15ns	3Ch	3Ch	32h	3Ch

Byte #	Function described	Function Supported				Hex value			
		E4	F5	G5	G6	E4	F5	G5	G6
30	Minimum active to precharge time ($=t_{RAS}$)	45ns	45ns	45ns	45ns	2Dh	2Dh	2Dh	2Dh
31	Module Rank density	1GB				01h			
32	Command and address signal input setup time	0.25ns	0.20ns	0.175ns	0.175ns	25h	20h	17h	17h
33	Command and address signal input hold time	0.37ns	0.27ns	0.250ns	0.250ns	37h	27h	25h	25h
34	Data signal input setup time	0.10ns	0.05ns	0.05ns	0.05ns	10h	05h	05h	05h
35	Data signal input hold time	0.22ns	0.17ns	0.125ns	0.125ns	22h	17h	12h	12h
36	Write Recovery Time ($=t_{WR}$)	15ns				3Ch			
37	Write to Read CMD delay ($=t_{WTR}$)	7.5ns	7.5ns	7.5ns	7.5ns	1Eh	1Eh	1Eh	1Eh
38	Read to Precharge CMD delay ($=t_{RTP}$)	7.5ns				1Eh			
39	Mem Analysis Probe	00	00	00	00	00			
40	Extension for bytes 41 and 42	00	00	00	00	00			
41	SDRAM device minimum active to active/auto-refresh time ($=t_{RC}$)	60ns	60ns	57.25ns	60ns	3Ch	3Ch	39h	3Ch
42	SDRAM device minimum active to autorefresh to active/auto-refresh time ($=t_{RFC}$)	105ns				69h			
43	SDRAM device maximum device cycle time ($=t_{CK MAX}$)	8ns				80h			
44	SDRAM device maximum skew between DQS and DQ signals ($=t_{DQSQ}$)	0.3ns	0.24ns	0.20ns	0.20ns	1Eh	18h	14h	14h
45	SDRAM device maximum read datahold skew factor ($=t_{QHS}$)	0.40ns	0.34ns	0.30ns	0.30ns	28h	22h	1Eh	1Eh
46	PLL Relock Time	6us --> 15us				0Fh			
47	Tcase max , DT4R4W	00				00h			
48	Thermal Resistance of DRAM Package from Top (Case) to Ambient	00				00h			
49	DRAM case Temperature Rise from Ambient due to Active Precharge / Mode Bits (DT0/Mode Bits)	00				00h			
50	DRAM case Temperature Rise from Ambient due to Precharge / Quiet Standby (DT2N/DT2O)	00				00h			
51	DRAM case Temperature Rise from Ambient due to Precharge Power-Down (DT2P)	00				00h			
52	DRAM case Temperature Rise from Ambient due to Active Standby (DT3N)	00				00h			
53	DRAM case Temperature Rise from Ambient due to Active Power-Down with Fast PDN Exit (DT3Pfast)	00				00h			
54	DRAM case Temperature Rise from Ambient due to Active Power-Down with Slow PDN Exit (DT3Pslow)	00				00h			
55	DRAM case Temperature Rise from Ambient due to Page Open Burst Read / DT4R4W Mode bit (DT4R/DT4R4W)	00				00h			
56	DRAM case Temperature Rise from Ambient due to Burst Refresh (DT5B)	00				00h			

Byte #	Function described	Function Supported				Hex value			
		E4	F5	G5	G6	E4	F5	G5	G6
57	DRAM case Temperature Rise from Ambient due to Bank Interleave Reads with Auto-Precharge (DT7)	00				00h			
58 - 61	Superset information (may be used in future)	-				00h			
62	SPD data revision code	1.2				12h			
63	Checksum for Bytes 0 ~ 62	-				43h	F4h	B5h	B4h
64	Manufacturer JEDEC ID code	ProMOS				40h			
65 -71 Manufacturer JEDEC ID code					00h			
72	Manufacturing location	02=Taiwan 05=China 0A=S-CH 04=Malaysia							
73-90	Module part number (ASCII)	V917565N24QC							
91	Manufacturer revision code (For PCB)	0				00			
92	Manufacturer revision code (For component)	0				00			
93	Manufacturing date (Year) in BCD. Example: Year 2006 = 06h	-				-			
94	Manufacturing date (Week) in BCD. Example: Week 28 = 28h	-				-			
95~98	Assembly serial #	-				-			
99~127	Manufacturer specific data (may be used in future)	Undefined				00h			
128~255	Open for customer use	Undefined				00h			

Absolute Maximum DC Ratings

Parameter	Symbol	MIN	MAX	UNITS
VDD Supply Voltage relative to VSS	VDD	-1.0	2.3	V
VDDQ Supply Voltage relative to VSS	VDDQ	-0.5	2.3	V
VDDL Supply Voltage relative to VSS	VDDL	-0.5	2.3	V
Voltage on any pin relative to VSS	VIN, VOUT	-0.5	2.3	V
Storage Temperature	T _{STG}	-55	100	°C

Note: Stresses greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device.

AC & DC Operating Conditions
Recommended DC Operating Conditions

Parameter	Symbol	MIN	NOM	MAX	UNITS	Notes
VDD Supply Voltage relative to VSS	VDD	1.7	1.8	1.9	V	1
VDDQ Supply Voltage relative to VSS	VDDQ	1.7	1.8	1.9	V	4
VDDL Supply Voltage relative to VSS	VDDL	1.7	1.8	1.9	V	4
I/O Reference Voltage	VREF	0.49xVDDQ	0.50xVDDQ	0.51xVDDQ	V	2
I/O Termination Voltage(system)	VTT	VREF-0.04	VREF	VREF+0.04	V	3

Note:

1. VDD and VDDQ must track each other. VDDQ must be less than or equal to VDD.
2. VREF is expected to equal to VDDQ/2 of the transmitting device and to track variations in the DC level of the same. Peak to Peak AC noise on the VREF may not exceed +/-2% VREF(DC).
3. VTT of the transmitting device must track VREF of receiving device.
4. VDDQ tracks with VDD; VDDL tracks with VDD.

Input Electrical Characteristics and operating Conditions

Input DC Logic Levels

Parameter	Symbol	MIN	MAX	UNITS
Input High (Logic 1) Voltage	VIH(DC)	VREF+0.125	VDDQ+0.3	V
Input Low (Logic 0) Voltage	VIL(DC)	-0.3	VREF-0.125	V

Input AC Logic Levels

Parameter	Symbol	DDR2 533		DDR2 667, 800		UNITS
		MIN	MAX	MIN	MAX	
ac input logic high	VIH(AC)	VREF+0.250	-	VREF+0.20	-	V
ac input logic low	VIL(AC)	-	VREF-0.250	-	VREF-0.20	V

DDR2 IDD Current Definitions

Symbol	Proposed Conditions	Units	Notes
IDD0	Operating one bank active-precharge current; t _{CK} = t _{CK} (IDD), t _{RC} = t _{RC} (IDD), t _{RAS} = t _{RASmin} (IDD); CKE is HIGH, CS\ is HIGH between valid commands; Address bus inputs are SWITCHING; Data bus inputs are SWITCHING	mA	
IDD1	Operating one bank active-read-precharge current; I _{OUT} = 0mA; BL = 4, CL = CL(IDD), AL = 0; t _{CK} = t _{CK} (IDD), t _{RC} = t _{RC} (IDD), t _{RAS} = t _{RASmin} (IDD), t _{RCD} = t _{RCD} (IDD); CKE is HIGH, CS\ is HIGH between valid commands; Address bus inputs are SWITCHING; Data pattern is same as IDD4W	mA	
IDD2P	Precharge power-down current; All banks idle; t _{CK} = t _{CK} (IDD); CKE is LOW; Other control and address bus inputs are STABLE; Data bus inputs are FLOATING	mA	
IDD2Q	Precharge quiet standby current; All banks idle; t _{CK} = t _{CK} (IDD); CKE is HIGH, CS\ is HIGH; Other control and address bus inputs are STABLE; Data bus inputs are FLOATING	mA	
IDD2N	Precharge standby current; All banks idle; t _{CK} = t _{CK} (IDD); CKE is HIGH, CS\ is HIGH; Other control and address bus inputs are SWITCHING; Data bus inputs are SWITCHING	mA	
IDD3P	Active power-down current; All banks open; t _{CK} = t _{CK} (IDD); CKE is LOW; Other control and address bus inputs are STABLE; Data bus inputs are FLOATING	Fast PDN Exit MRS(12) = 0mA	mA
		Slow PDN Exit MRS(12) = 1mA	mA
IDD3N	Active standby current; All banks open; t _{CK} = t _{CK} (IDD), t _{RAS} = t _{RASmax} (IDD), t _{RP} = t _{RP} (IDD); CKE is HIGH, CS\ is HIGH between valid commands; Other control and address bus inputs are SWITCHING; Data bus inputs are SWITCHING	mA	
IDD4W	Operating burst write current; All banks open, Continuous burst writes; BL = 4, CL = CL(IDD), AL = 0; t _{CK} = t _{CK} (IDD), t _{RAS} = t _{RASmax} (IDD), t _{RP} = t _{RP} (IDD); CKE is HIGH, CS\ is HIGH between valid commands; Address bus inputs are SWITCHING; Data bus inputs are SWITCHING	mA	
IDD4R	Operating burst read current; All banks open, Continuous burst reads, I _{OUT} = 0mA; BL = 4, CL = CL(IDD), AL = 0; t _{CK} = t _{CK} (IDD), t _{RAS} = t _{RASmax} (IDD), t _{RP} = t _{RP} (IDD); CKE is HIGH, CS\ is HIGH between valid commands; Address bus inputs are SWITCHING; Data pattern is same as IDD4W	mA	
IDD5B	Burst auto refresh current; t _{CK} = t _{CK} (IDD); Refresh command at every t _{RFC} (IDD) interval; CKE is HIGH, CS\ is HIGH between valid commands; Other control and address bus inputs are SWITCHING; Data bus inputs are SWITCHING	mA	
IDD6	Self refresh current; CK and CK\ at 0V; CKE = 0.2V; Other control and address bus inputs are FLOATING; Data bus inputs are FLOATING	Normal	mA
		Low Power	mA
IDD7	Operating bank interleave read current; All bank interleaving reads, I _{OUT} = 0mA; BL = 4, CL = CL(IDD), AL = t _{RCD} (IDD) - 1 * t _{CK} (IDD); t _{CK} = t _{CK} (IDD), t _{RC} = t _{RC} (IDD), t _{RRD} = t _{RRD} (IDD), t _{RCD} = 1 * t _{CK} (IDD); CKE is HIGH, CS\ is HIGH between valid commands; Address bus inputs are STABLE during DESELECTs; Data pattern is same as IDD4R; Refer to the following page for detailed timing conditions	mA	

DDR2 IDD Current Table


Symbol		E4 PC2-4200@CL4	F5 PC2-5300@CL5	G5 PC2-5300@CL5	G6 PC2-5300@CL6	Unit
IDD0		1440	1440	1620	1800	mA
IDD1		1620	1620	1620	1800	mA
IDD2P		144	144	144	144	mA
IDD2Q		540	540	720	720	mA
IDD2N		540	720	720	900	mA
IDD3P	Fast PDN Exit MR[12]=0	540	540	540	630	mA
	Slow PDN Exit MR[12]=1	216	216	216	216	mA
IDD3N		720	900	900	1080	mA
IDD4R		1440	1800	2160	2520	mA
IDD4W		1620	2160	2520	2880	mA
IDD5B		2700	2700	2880	2880	mA
IDD6	Normal	144	144	144	144	mA
	Low Power	72	72	72	72	mA
IDD7		3780	3780	3960	4140	mA

AC Characteristics (AC operating conditions unless otherwise noted)

Parameter	Symbol	(DDR2-533) -E4		(DDR2-667) -F5		(DDR2-800) -G5		(DDR2-800) -G6		Unit	
		Min	Max	Min	Max	Min	Max	Min	Max		
Row Cycle Time	t_{RC}	60	-	60	-	57.25	-	60	-	ns	
Auto Refresh Row Cycle Time	t_{RFC}	105	-	105	-	105	-	105	-	ns	
Row Active Time	t_{RAS}	45	70K	45	70K	45	70K	45	70K	ns	
Row Address to Column Address Delay	t_{RCD}	15	-	15	-	12.5	-	15	-	ns	
Row Active to Row Active Delay (x4 & x8)	t_{RRD}	7.5	-	7.5	-	7.5	-	7.5	-	ns	
Row Active to Row Active Delay (x16)	t_{RRD}	10	-	10	-	10	-	10	-	ns	
Column Address to Column Address Delay	t_{CCD}	2	-	2	-	2	-	2	-	CLK	
Row Precharge Time	t_{RP}	15	-	15	-	12.5	-	15	-	ns	
Write Recovery Time	t_{WR}	15	-	15	-	15	-	15	-	ns	
Last Data-In to Read Command	t_{DRL}	1	-	1	-	1	-	1	-	CLK	
Auto Precharge Write Recovery + Pre-charge Time	t_{DAL}	$t_{WR} + t_{RP}$	-	$t_{WR} + t_{RP}$	-	$t_{WR} + t_{RP}$	-	$t_{WR} + t_{RP}$	-	ns	
System Clock Cycle Time	\overline{CAS} Latency = 3	t_{CK}	5	8	5	8	5	8	-	-	ns
	\overline{CAS} Latency = 4		3.75	8	3.75	8	3.75	8	3.75	8	ns
	\overline{CAS} Latency = 5		3.75	8	3	8	2.5	8	3	8	ns
	\overline{CAS} Latency = 6		-	-	-	-	-	-	2.5	8	ns
Clock High Level Width	t_{CH}	0.45	0.55	0.45	0.55	0.45	0.55	0.45	0.55	CLK	
Clock Low Level Width	t_{CL}	0.45	0.55	0.45	0.55	0.45	0.55	0.45	0.55	CLK	
Data-Out edge to Clock edge Skew	t_{AC}	-0.50	0.50	-0.45	0.45	-0.40	0.40	-0.40	0.40	ns	
DQS-Out edge to Clock edge Skew	t_{DQSK}	-0.45	0.45	-0.40	0.40	-0.35	0.35	-0.35	0.35	ns	
DQS-Out edge to Data-Out edge Skew	t_{DQSQ}	-	0.30	-	0.24	-	0.20	-	0.20	ns	
Data-Out hold time from DQS	t_{QH}	t_{HPmin} $-t_{QHS}$	-	t_{HPmin} $-t_{QHS}$	-	t_{HPmin} $-t_{QHS}$	-	t_{HPmin} $-t_{QHS}$	-	ns	
Data hold skew factor	t_{QHS}	-	400	-	340	-	300	-	300	ps	
Clock Half Period	t_{HP}	$t_{CH/L}$ min	-	$t_{CH/L}$ min	-	$t_{CH/L}$ min	-	$t_{CH/L}$ min	-	ns	
Input Setup Time (fast slew rate)	t_{IS}	250	-	200	-	175	-	175	-	ps	
Input Hold Time (fast slew rate)	t_{IH}	375	-	275	-	250	-	250	-	ps	
Input Pulse Width	t_{IPW}	0.60	-	0.60	-	0.60	-	0.60	-	CLK	
Write DQS High Level Width	t_{DQSH}	0.35		0.35		0.35		0.35		CLK	
Write DQS Low Level Width	t_{DQSL}	0.35		0.35		0.35		0.35		CLK	
CLK to First Rising edge of DQS-In	t_{DQSS}	WL- 0.25 t_{CK}	WL+ 0.25 t_{CK}	WL- 0.25 t_{CK}	WL+ 0.25 t_{CK}	WL- 0.25 t_{CK}	WL+ 0.25 t_{CK}	WL- 0.25 t_{CK}	WL+ 0.25 t_{CK}	CLK	
Data-In Setup Time to DQS-In (DQ & DM)	t_{DS}	100	-	50	-	50	-	50	-	ps	
Data-in Hold Time to DQS-In (DQ & DM)	t_{DH}	225	-	175	-	125	-	125	-	ps	

Parameter	Symbol	(DDR2-533) -E4		(DDR2-667) -F5		(DDR2-800) -G5		(DDR2-800) -G6		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
DQS falling edge to CLK rising Setup Time	t_{DSS}	0.2	-	0.2	-	0.2	-	0.2	-	CLK
DQS falling edge from CLK rising Hold Time	t_{DSH}	0.2	-	0.2	-	0.2	-	0.2	-	CLK
DQ & DM Input Pulse Width	t_{DIPW}	0.35	-	0.35	-	0.35	-	0.35	-	CLK
Read DQS Preamble Time	t_{RPRE}	0.9	1.1	0.9	1.1	0.9	1.1	0.9	1.1	CLK
Read DQS Postamble Time	t_{RPST}	0.4	0.6	0.4	0.6	0.4	0.6	0.4	0.6	CLK
Write DQS Preamble Setup Time	t_{WPRES}	0	-	0	-	0	-	0	-	CLK
Write DQS Preamble Hold Time	t_{WPREH}	0.25	-	0.25	-	0.25	-	0.25	-	CLK
Write DQS Postamble Time	t_{WPST}	0.4	0.6	0.4	0.6	0.4	0.6	0.4	0.6	CLK
Internal read to precharge command delay	t_{RTP}	7.5	-	7.5	-	7.5	-	7.5	-	ns
Internal write to read command delay	t_{WTR}	7.5	-	7.5	-	7.5	-	7.5	-	ns
Data out high impedance time from CLK/ CLK	t_{HZ}	$t_{AC(min)}$	$t_{AC(max)}$	$t_{AC(min)}$	$t_{AC(max)}$	$t_{AC(min)}$	$t_{AC(max)}$	$t_{AC(min)}$	$t_{AC(max)}$	ns
Data out low impedance time from CLK/ CLK	t_{LZ}	$t_{AC(min)}$	$t_{AC(max)}$	$t_{AC(min)}$	$t_{AC(max)}$	$t_{AC(min)}$	$t_{AC(max)}$	$t_{AC(min)}$	$t_{AC(max)}$	ns
Mode Register Set Delay	t_{MRD}	2	-	2	-	2	-	2	-	CLK
Exit Self Refresh to Non-Read Command	t_{XSNR}	$t_{RFC}+10$	-	$t_{RFC}+10$	-	$t_{RFC}+10$	-	$t_{RFC}+10$	-	ns
Exit Self Refresh to Read Command	t_{XSRD}	200	-	200	-	200	-	200	-	CLK
Exit Precharge Power Down to any non- Read Command	t_{XP}	2	-	2	-	2	-	2	-	CLK
Exit Active Power Down to Read Com- mand	t_{XARD}	2	-	2	-	2	-	2	-	CLK
Exit Active Power Down to Read Com- mand (Slow exit, Lower Power)	t_{XARDS}	6-AL	-	6-AL	-	6-AL	-	6-AL	-	CLK
ODT drive mode output delay	t_{OIT}	0	12	0	12	0	12	0	12	ns
Minimum time clocks remains ON after CKE asynchronously drops LOW	t_{Delay}	$tIS+tCK$ $+tIH$		$tIS+tCK$ $+tIH$		$tIS+tCK$ $+tIH$		$tIS+tCK$ $+tIH$		ns
CKE minimum high and low pulse width	t_{CKE}	3	-	3	-	3	-	3	-	CLK


Package Dimension

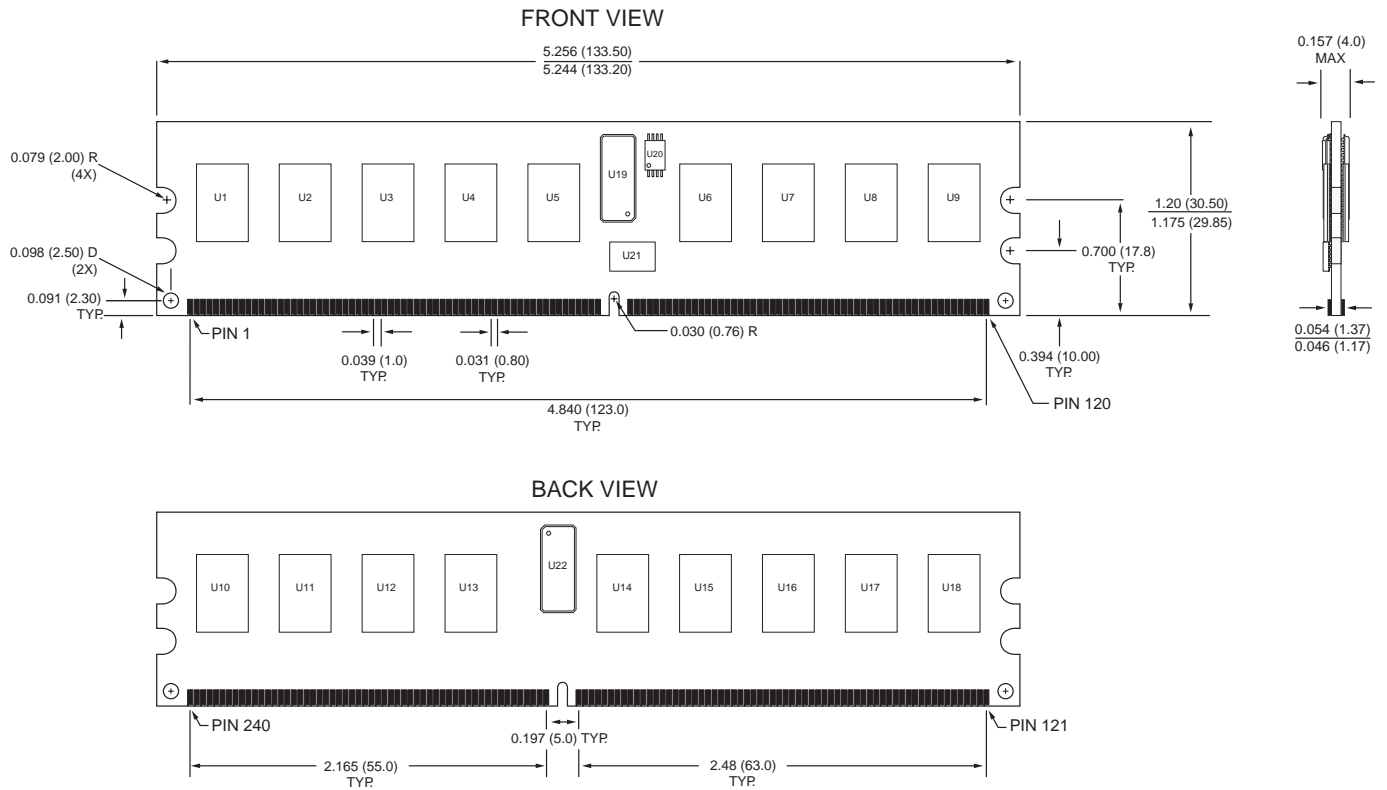

NOTE:

All dimensions are in inches (millimeters); $\frac{MAX}{MIN}$ or typical where noted.

Label Information

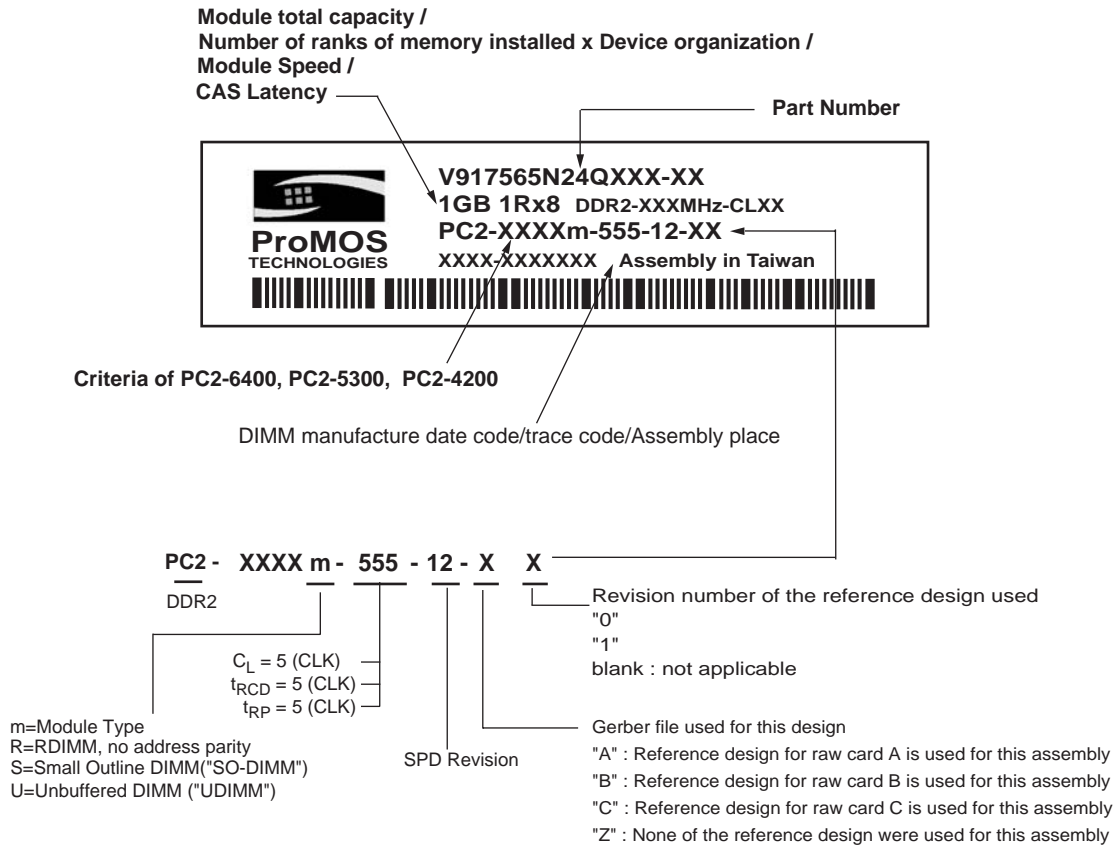

WORLDWIDE OFFICES**SALES OFFICES:****TAIWAN(Hsinchu)**

NO. 19 LI HSIN ROAD
SCIENCE BASED IND. PARK
HSIN CHU, TAIWAN, R.O.C.
PHONE: 886-3-566-3952
FAX: 886-3-578-6028

USA(West)

3910 NORTH FIRST STREET
SAN JOSE, CA 95134
PHONE: 408-433-6000
FAX: 408-433-0952

JAPAN

ONZE 1852 BUILDING 6F
2-14-6 SHINTOMI, CHUO-KU
TOKYO 104-0041
PHONE: 81-3-3537-1400
FAX: 81-3-3537-1402

TAIWAN(Taipei)

7F, NO. 102 MIN-CHUAN E. ROAD
SEC. 3, Taipei, Taiwan, R.O.C
PHONE: 886-2-2545-1213
FAX: 886-2-2545-1209

USA(East)

25 Creekside Road
Hopewell Jct, NY 12533
PHONE: 845-223-1689
FAX: 845-223-1684

The information in this document is subject to change without notice.

ProMOS TECH makes no commitment to update or keep current the information contained in this document. No part of this document may be copied or reproduced in any form or by any means without the prior written consent of ProMOS TECH.

ProMOS TECH subjects its products to normal quality control sampling techniques which are intended to provide an assurance of high quality products suitable for usual commercial applications. ProMOS TECH does not do testing appropriate to provide 100% product quality assurance and does not assume any liability for consequential or incidental arising from any use of its products. If such products are to be used in applications in which personal injury might occur from failure, purchaser must do its own quality assurance testing appropriate to such applications.